

Serie | 6 Ventilation**DWB091E51A**
90 cm Wall-Mounted Stainless
Steel Canopy Rangehood**The wall-mounted rangehood: a functional design element in the kitchen.**

- **Extraction rate:** at 810 m³/h, it quickly ensures optimal kitchen air quality.
- **Especially quiet:** high performance at just 66 dB.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting with reset:** automatically resets the hood to regular speed setting after 6 min.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	Australia Standards, CE, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	582-908/582-1018
Height of product, without chimney (mm) :	46
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	21.0
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m ³ /h) :	610
Boost position output recirculating (m ³ /h) :	480
Maximum output recirculating air (m ³ /h) :	400
Boost position air extraction (m ³ /h) :	810
Number of lights :	3
Noise level (dB) :	66
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable stainless steel
EAN code :	4242002780368
Connection Rating (W) :	269
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted

**Optional accessories**

DHZ5345 : Recirculating kit
DSZ6240 : CleanAir Recirculation Kit

Serie | 6 Ventilation

DWB091E51A

90 cm Wall-Mounted Stainless Steel Canopy Rangehood

The wall-mounted rangehood: a functional design element in the kitchen.

Design

- slimline design
- Appliance colour: Stainless steel

Power and Mode of Operation

- 3 power levels + 2 intensive levels
- Extraction rate according to EN 61591 Ø 15 cm:
 - max. Normal use 610 m³/h
 - Intensive 810 m³/h
- Ducted and recirculated-air operation
- Electronic controls with red LED display
- Twin channel high performance fan motor
- Rim ventilation


Comfort & Convenience

- Intensive operation automatic revert - 6min
- Automatic run on - 10 min
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
 - Max. normal use: 66 dB(A) re 1 pW (52 dB(A) re 20 µPa sound pressure)
 - Intensive: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Additional sound insulation mats for optimised sound absorption
- 3 x 3 Watt LED Lights
- SoftLight with dimming function
- EcoSilence BLDC brushless motor
- Average Energy Consumption: 34.4 kWh/year
- Saturation display for filters
- Dishwasher safe metal grease filters
- Accessories required for recirculation mode: CleanAir Module



Dimensions (HxWxD)

- Appliance width: 900 mm
- Dimensions recirculating (HxWxD): 628-1064 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 689 x 900 x 500 mm - mounting with outer chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

90 cm Wall-Mounted Stainless Steel Canopy Rangehood



Measurements in mm

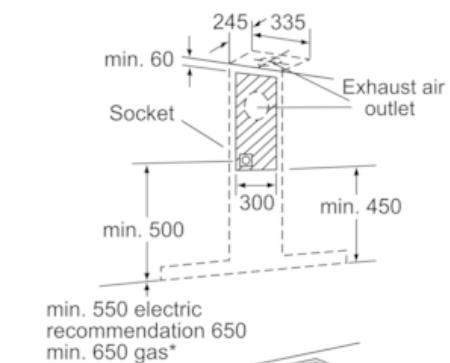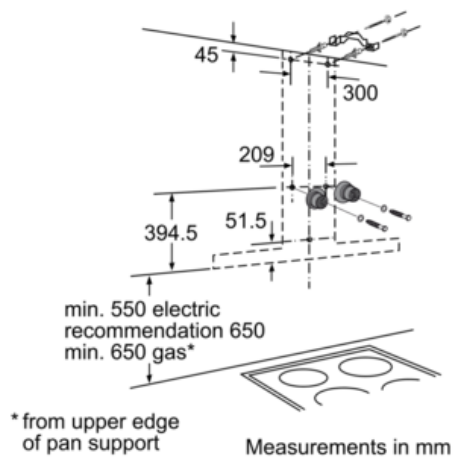

* from upper edge
of pan support

Measurements in mm

