


Series 8, Built-in compact oven with steam function, 60 x 45 cm, Black CSG958DB1

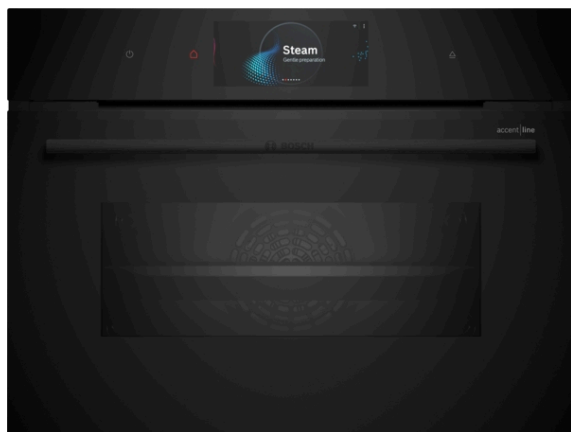

Included accessories

1 x enamel baking tray, 1 x grid, 1 x universal pan, 1 x steam container, punched, size XL, 1 x sponge, 1 x Steam container, punched, size M, 1 x Steam container, unpunched, size M

Optional accessories

HEZ530000 : Half tray
HEZ531010 : Baking tray, non-stick ceramic coated
HEZ532010 : Universal pan, non-stick ceramic coated
HEZ631070 : Baking tray, anthracite enamelled

- **TFT Touch Display Pro:** perfect control thanks to an innovative Digital Control Ring and full-surface TFT touchscreen.
- **Air Fry Function:** for perfectly fried foods, such as vegetables and chips.
- **Eco Clean Direct:** easy cleaning thanks to a coating that breaks down grease while you bake.
- **Steam Function with Sous-Vide:** for gentle, healthy food preparation that keeps food moist throughout.
- **Added Steam Function:** food turns out crispy on the outside and juicy on the inside.

Technical Data

Color / Material Front : Black
Built-in / Free-standing : Built-in
Door opening : Drop down
Cleaning : Catalytic liners (all sides), Hydrolytic
Control Panel Material : Glass
Door Material : Glass
Dimensions (HxWxD) : 455 x 594 x 548 mm
Dimensions of the packed product (HxWxD) : 520 x 660 x 690 mm
Min. required niche size for installation (HxWxD) : 450-455 x 560-568 x 550 mm
Cavity dimensions : 235 x 480 x 415 mm
Usable volume of cavity : 47 l
Number of interior lights : 1
Net weight : 36.2 kg
Gross weight : 38.5 kg
EAN code : 4242005326211
Connection Rating : 3300 W
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Length electrical supply cord : 150.0 cm



Series 8, Built-in compact oven with steam function, 60 x 45 cm, Black CSG958DB1

Heating Functions

- Compact steam oven with 24 heating methods: 4D HotAir, Top/bottom heating, Hot air grilling, Full width grill, Half width grill, Pizza setting, Bottom heating, Intensive heat, Slow cooking, Preheat ovenware, Drying, Keep warm, Hotair gentle, Conventional heat gentle, AirFry, Pure steaming, Reheating, Dough Proving, Defrost setting, sous-vide cooking, hotair grilling + steam, keep warm + steam, 4D hotAir + steam, Top/bottom heat + steam
- Temperature range 30 °C - 250 °C.
Steam Function Plus 120 °C
- Steam Function Plus 120 °C
- Cavity volume: 47 net usable litres

Hook-in racks / rails

- Number of shelf levels: 3
- 1 set of level independent telescopic rails (Clip-on rail), fully extendable, safety stop function

Design

- Carbon Black Design
- Anthracite enamel cavity with 3 shelf positions
- Touch control
- Digital Control Ring

Cleaning

- EcoClean Direct: coating of ceiling, back panel, side liners
- Cleaning Assistance (HydroClean program)

Convenience

- Automatic temperature proposal, Residual heat indicator, Actual temperature display, Meat probe function
- Air Fry Function
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- Steam Boost - add for 3min intensive steam with a touch of a button.
- PerfectRoast Plus
- PerfectBake plus
- Bosch Assist - a menu of dishes for automatic cooking
- HomeConnect
- Oven Assistant with Voice Control
- Automatic rapid heat function
- Drop down door
- Integrated cooling fan
- LED lighting
- Electronic clock/timer with end time programming
- Water tank empty indicator
- Location of the steam generator is outside of the cavity

Accessories

- 1 x enamel baking tray, 1 x Steam container, punched, size M, 1 x steam container, punched, size XL, 1 x Steam container, unpunched, size M, 1 x grid, 1 x sponge, 1 x universal pan

Safety and Environment

- Mechanical safety locking device, Child lock, Automatic safety switch off function, Residual heat indicator, Start button, Door contact switch
- Triple glazed door
- Full glass inner door

Technical Info

- Length of mains cable: 150 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.3 KW

Dimensions

- Appliance dimensions (HxWxD): 455 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

