

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use



EAN: 4002516718512 / Material number: 12350340

Construction type	
Integrated extractor	•
Operating modes	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 15-P
Design	
Colour	Stainless Steel
User convenience	
Electronic controls	•
Rotary knob	•
Power levels (number without Booster level)	2
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless-steel grease filters (10-ply)	1
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3000 Kelvin
Blower	
Dual-action fan	•
AC motor	•
Extraction	
Air throughput in Level 1 (m³/h) according to EN 61591	230
Air throughput in Level 2 (m³/h) according to EN 61591	350
Air throughput in Booster level (m³/h) according to EN 61591	590
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	66.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	52.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.2
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	185
Air throughput in Level 2 (m³/h) according to EN 61591	305
Air throughput in Booster level (m³/h) according to EN 61591	525
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use




EAN: 4002516718512 / Material number: 12350340

Technical data	
Canopy width in mm	532
Canopy height in mm	50
Canopy depth in mm	372
Net weight in kg	10.2
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Total rated load in kW	0.226
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Type of air guide	•
Recirculation conversion kit (order separately)	•
Active charcoal filter (order separately)	150
Accessories supplied	
No-return flap	•
Optional accessories	
DDF 125/50 Roof vent	•
DMK 150-1 Wall vent	•

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use

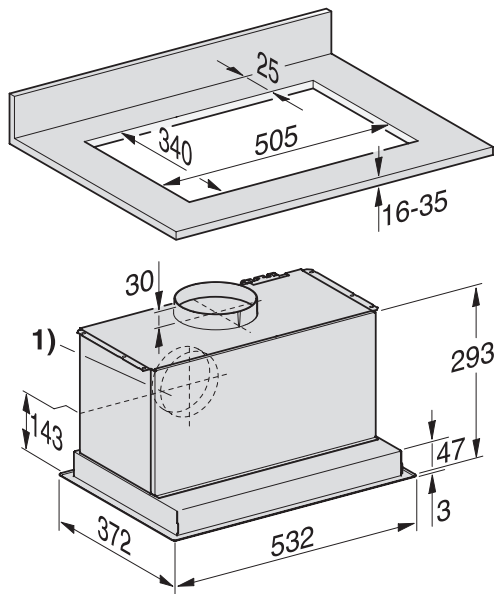

DA2450, DA2450-1, DA2558 (Installation drawing)

1) Vent connection alternatively to rear, You will find further detailed measurements in the instructions for use!