


KM 7220 FL

Induction cooktop with mains plug, operated with its own controls with 3 individual cooking zones at an attractive entry-level price

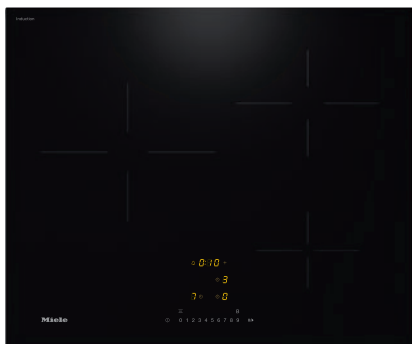

- With mains plug for particularly easy connection
- Quick selection via numerical keybank – ComfortSelect
- 3 individual cooking zones in various sizes
- A width of 620 mm for surface-mounted or flush-fit installation

EAN: 4002516758464 / Material number: 12399750

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Flush	•
Ceramic surface colour	Black
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	3
Number of cooking areas	0
Maximum number of pans	3
1st cooking zone/cooking area	
Position	Left
Type	Dual-circuit ring
Size in mm	Ø 140-280
Max. Booster power rating in W	3000
Max. rating in W	2300
2nd cooking zone/cooking area	
Position	rear right
Type	Dual-circuit ring
Size in mm	110-220
Max. Booster power rating in W	3000
Max. rating in W	2300
3rd cooking zone/cooking area	
Position	front right
Type	Dual-circuit ring
Size in mm	Ø 90-160
Max. Booster power rating in W	1850
Max. rating in W	1350
User convenience	
Operation via sensor controls	ComfortSelect
Pan and pan size recognition	•
Display colour	Yellow
Auto Heat-up	•
Keeping warm	•
Stop & Go function	•
Recall function	•
Safety switch-off	•
Permanent pan recognition	•
Individual setting options (e.g. buzzers)	•
Minute minder	•
Efficiency and sustainability	
Residual heat utilisation	•
Cleaning convenience	
Easy-to-clean ceramic glass	•
Safety	
Safety switch-off	•
Lock function	•

KM 7220 FL

Induction cooktop with mains plug, operated with its own controls
with 3 individual cooking zones at an attractive entry-level price




EAN: 4002516758464 / Material number: 12399750

System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	620
Dimensions in mm (height)	53
Dimensions in mm (depth)	520
Cutout dimensions in mm (width) with surface-mounted installation	560
Cutout dimensions in mm (depth) with surface-mounted installation	500
Casing height incl. connection box in mm	53
Internal cutout dimensions in mm (width) with flush installation	600
Internal cutout dimensions in mm (depth) with flush installation	500
Weight in kg	9
External cutout dimensions in mm (width) with flush installation	624
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	3.45
Length of supply lead in m	2.0
Voltage in V	230
Frequency in Hz	50
Accessories supplied	
Mains cable	No


KM 7220 FL

Installation diagrams

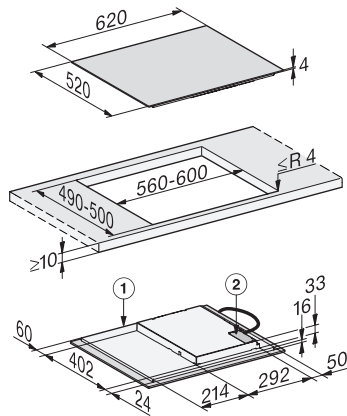

KM7220FL surface-mounted – AU (Installation drawing)

1) front, 2) Mains connection box with mains connection cable, mains connection cable L = 2000 mm

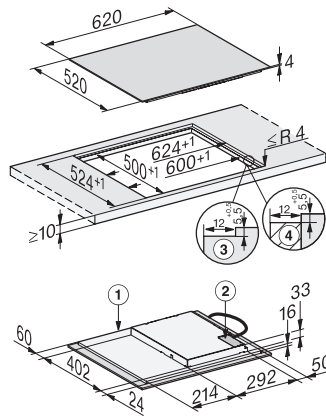

KM7220FL flush – AU (Installation drawing)

1) front, 2) mains connection box with mains connection cable, mains connection cable L = 2000 mm, 3) Step milling natural stone countertop, 4) Wooden strip 12 mm (not supplied accessories)