

Model Number	X3T12S
Hood Mounting	Built In (Undermount) - Flush or Proud Install
Cooking Coverage	Suits 90cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 8x (Warm White 1.0W) - Front & Rear Panel
Finish	AISI304 1.2mm Food Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) Auto fan shut off after 2-hours of inactivity
Outlet	"Twin" Top or Back Duct Outlets
Ducting (Remote)	Dia. 200mm Acoustic Flexi Ducting - Five (5) Meter Length (2x Supplied)
Ducting (On Board)	Optional On Board Motor Ducting Kits Available Ultra Motor - Dia. 200mm (Recommended)
Hood Width	1160mm
Hood Depth	480mm
Hood Height	650mm (Top Duct Outlet - Plus 25mm)
Installation Height	800* (Recommended) 600mm* (Minimum) <small>* Clearance above the highest point of the cooktop to the underside of hood</small>



Whispair Endurance Warranty



Filtration Zone




Your Hood. Your Colour. Your Way.

Available Finishes (Stainless Steel Finish Standard)



Dimensioned Drawing

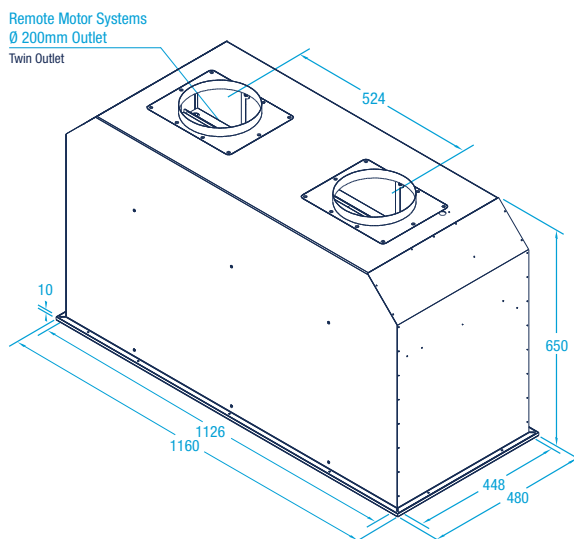

Available Models - Select Your Motor Solution & Optional Finish

On Board

X3T12S6.20U (/T or /B)

"Twin" Ultra 1,680m³/hr (Top or Back Ducted)

Remote External (Roof or Wall Mounted)

X3T12S5.2EP

"Twin" Pro 1,140m³/hr

SPL: 49.6dB(A) In / 58.5dB(A) Out

X3T12S5.2EPP

"Twin" Pro Plus 2,010m³/hr

SPL: 56.6dB(A) In / 62.8dB(A) Out

Remote Inline (Through Wall or Eave)

X3T12S5.2IP

"Twin" Pro 1,140m³/hr

SPL: 49.6dB(A) In / 58.5dB(A) Out

Your Hood. Your Colour. Your Way. (Optional Undermount Finish)*

X1P3.BL

Paint Finish - Satin Black

X1P3.WH

Paint Finish - Satin White

X1P3.CUS

Paint Finish - Custom Colour

*Additional charges apply

SPL - Nominal Sound Pressure Level on Boost (Max) Speed