

N 90
OVEN WITH VARIOSTEAM
B58VT68H0B



COOKING PASSION SINCE 1877



Built-in oven with VarioSteam® and SLIDE&HIDE® - fuller flavour and unrestricted access to the oven interior.

- ✓ Slide&Hide® - the fully retracting oven door.
- ✓ VarioSteam® - Steam assistance for CircoTherm® ovens, that cooks foods moist on the inside and crisp on the outside.
- ✓ The Multi Point® meat probe helps the oven regulate the temperature and automatically adjust the cooking time.
- ✓ The duo for perfect cleaning: Pyrolysis after heavy use - the oven interior cleans itself.
- ✓ EasyClean® - the environment-saving option for fast oven cleaning.
- ✓ FullTouch Control - simple, precise oven control by fingertip touch on the smooth surface of the high resolution TFT colour display.
- ✓ NeffLight® - perfect illumination of all four oven levels, even with the door shut.
- ✓ ComfortFlex® - the telescoping rails come out far enough to let you grasp the baking sheet conveniently from the sides.



Included accessories

1 x combination grid, 1 x universal pan

Optional accessories

Z11CR10X0 : Baking and roasting grid (standard) ,
Z11SZ00X0 : SeamlessCombination mounting kit ,
Z11SZ80X0 : SeamlessCombination 60 + 29cm , Z11SZ90X0 :
SeamlessCombination 60 + 45cm , Z11TC10X0 : ComfortFlex
Rail (1 level) , Z12CB10A0 : Baking tray, anthracite enamelled ,
Z12CL10A0 : Lid for professional pan, enamelled anth , Z12CM10A0 :
Moussaka pan, anthracite enamelled , Z12CN10A0 : Professional
pan, anthracite enamelled , Z12CP10A0 : Pizza pan, anthracite
enamelled , Z12CQ10A0 : Grill tray, anthracite enamelled ,
Z12CU10A0 : Multipurpose pan, anthracite enamelled , Z12TF36X0 :
3 level telescopic rails, full ext,pyro , Z13CV05S0 : Cover Strip ,
Z18V60X0 : Cookbook , Z1913X0 : Baking Stone , Z19DD10X0 :
Steam set for ovens

Features

Technical Data

Color / Material Front : Stainless steel
Built-in / Free-standing : Built-in
Integrated Cleaning system : Hydrolytic, Pyrolytic
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
Dimensions of the product (mm) : 595 x 596 x 548
Dimensions of the packed product (HxWxD) (mm) : 670 x 700 x 660
Control Panel Material : Stainless steel
Door Material : Glass
Net weight (kg) : 36.071
Usable volume of cavity (l) : 71
Cooking method : , 4D hot air, Bottom heat, Bread Baking Setting, Conventional heat, Defrost, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, pre-heating, warming
First cavity material : Enamelled
Temperature control : electronic
Number of interior lights : 3
Approval certificates : CE, VDE
Length electrical supply cord (cm) : 120
EAN code : 4242004236092
Number of cavities (2010/30/EC) : 1
Energy efficiency class (2010/30/EC) : A
Energy consumption per cycle conventional (2010/30/EC) : 0.90
Energy consumption per cycle forced air convection (2010/30/EC) : 0.74
Energy efficiency index (2010/30/EC) : 87.1
Electrical connection rating (W) : 3450
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 60; 50
Plug type : no plug



4 242004 236092

N 90
OVEN WITH VARIOSTEAM
B58VT68H0B

Features

Heating Functions

- Oven with 14 heating methods:
 - Hot Air
 - CircoTherm® Eco
 - Top/bottom heating
 - Top/bottom heating Eco
 - Circo-roasting
 - Full surface grill
 - Centre area grill
 - CircoTherm® Intensive
 - Bread Baking
 - Bottom heating
 - Low temperature cooking
 - Defrost
 - Plate warming
 - Keep warm
- Additional heating methods with steam: Reheating, Dough Proving
- Temperature range 40 °C - 275 °C
- Cavity volume: 71 net usable litres

Design

- Touch control
- Anthracite enamel cavity with 4 shelf positions

Cleaning

- Pyrolytic self cleaning
- EasyClean® Cleaning aid programm
- Full glass inner door - safer touch door

Convenience

- 5.7" TFT colour and graphics Display with FullTouch control
- Temperature proposal
 - Optical temperature control
 - Actual temperature display
 - Sabbath setting
- Additional functions:
 - Descaling program
 - Steam cooking function (system steamer accessory required)
 - Drying function
- Slide&Hide® door, SoftOpen
- Bake and Roast assist, Automatic programs
- Number of automatic programmes: 14 PC
- MultiPoint MeatProbe
- Electronic clock
- Rapid heating-up
- NeffLight®, LED lighting
- Large 1 litre water tank
- Water tank empty indicator
- Location of the steam generator is outside of the cavity
- Cooling fan
- Stainless-steel fan
- Info button
- Revolution handle

Hook-in racks / rails

- Cavity with shelf support rails, Telescopic shelf rail, 1-level flexible, full extension, safety stop function

Accessories

- 1 x combination grid, 1 x universal pan

Safety and Environment



- Individual adjustable child lock
 - Safety switch off
 - Residual heat indicator
 - start button
 - Door contact switch
- Quadruple glazed CoolTouch door

Technical Info

- Length of mains cable: 120 cm
- Total connected load electric: 3.45 KW
- Appliance dimensions (HxWxD): 595 mm x 596 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

N 90
 OVEN WITH VARIOSTEAM
 B58VT68H0B

Dimensioned drawings

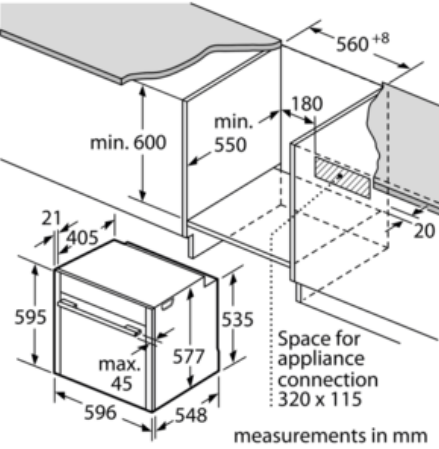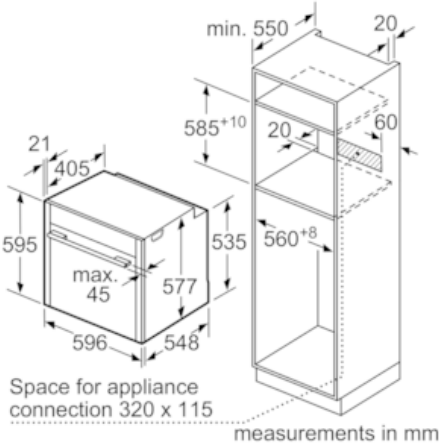

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm