

Color Variants

VI462111  
Stainless steel frame  
Width 60 cm

Optional accessories  
GP900004  
Stainless steel frying sensor pan

VI462111  
Vario flex induction cooktop 400 series  
Stainless steel frame  
Width 60 cm

Flex function for combining the rectangular cooking areas  
Free positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width  
Frying sensor function for temperature control in pans  
Easy control of all functions with bicoloured display  
Solid stainless steel control knob  
Precision crafting of 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting  
Can be combined perfectly with other Vario appliances of the 400 series

**Cooking zones**  
2 flex induction cooking areas with each 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).  
2 flex induction cooking areas 19x23 cm (2200 W, with booster 3700 W), linked together 38x23 cm (3300 W, with booster 3700 W).

**Handling**  
Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 output levels.  
User friendly control with bicoloured display (white / orange).

**Features**  
Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.

**Safety**  
Individual residual heat indicators.  
Safety shut-off.

**Planning notes**  
Depending on the type of installation (surface-mounted or flush-mounted), the specific location of the cut-out and the knob positions may vary.  
The horizontal positioning of the knobs may be aligned with the specific cooking areas.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If installing filler strip VA 450 take into account the additional space required for the depth.  
If combining several appliances with at least one appliance cover, the filler strip VA 450 is required to compensate for the depth of the appliance without the appliance cover.  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
In the cut-out, the installation system requires the side edge to be at least 10 mm for surface mounting and at least 13 mm for flush mounting. Ensure a continuous cut surface of 90°.


Characteristics
Product name/family
Cooking zone ceramic
Construction type
Built-in
Energy input
Electric
Total number of positions that can be used at the same time
4
Type of control setting devices
Required niche size for installation (HxWxD)
55 x 560-560 x 490-490
Width of the product (mm)
590
Dimensions of the product (mm)
55 x 590 x 520
Dimensions of the packed product (HxWxD) (mm)
113 x 1091 x 709
Net weight (kg)
18.0
Gross weight (kg)
19.0
Residual heat indicator
Separate
Location of control panel
External control
Type of external control possibility
Basic surface material
Ceramic
Color of surface
Black, Stainless steel
Color of frame
Stainless steel
Approval certificates
AENOR, CE
Length electrical supply cord (cm)
150
Knob Material
Full metal
Sealed Burners
No
heating with booster
All
Type of pan support
Natural Gas Connection Rating (BTU)
LP Gas Connection Rating (BTU)
Dimension of 1st heating element (in)
Power of heating element (kW)
Power of 1st burner (BTU)
Dimension of 2nd heating element (in)
Power of 2nd heating element (kW)
3.3
Power of 2nd burner (BTU)
Dimension of 3rd heating element (in)
Power of 3rd heating element (kW)
Power of 3rd burner (BTU)
Dimension of 4th heating element (in)
Power of 4th heating element (kW)
Power of 4th burner (BTU)
Dimension of 5th heating element (in)
Power of 5th heating element (kW)
Power of 5th burner (BTU)
Dimension of 6th heating element (in)
Power of heating element (kW in boost)
Power of 2nd heating element (kW in boost)
3.7
Power of 3rd heating element (kW in boost)
Power of 4th heating element (kW in boost)
Power of 5th heating element (kW in boost)
Power of 6th heating element (kW in boost)
3.7

Consumption and connection features
Electrical connection rating (W)
7400
Gas connection rating (W)
Current (A)
32; 2*16
Voltage (V)
220-240
Frequency (Hz)
50; 60

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.  
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.  
The wok pan WP 400 001 cannot be used with this appliance.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 18 kg.


**Connection**  
Total connected load 7.4 kW.  
Connecting cable 1.5 m without plug.

Cross-section

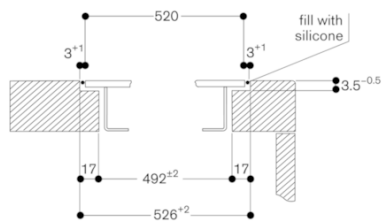



When installing with appliance cover or filler strip, pay attention to the deeper cut-out and the front and rear groove width.

View from above

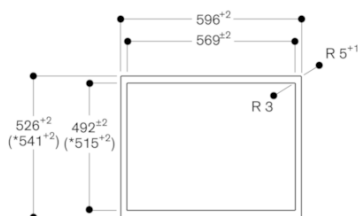


\* with filler strip

Longitudinal section

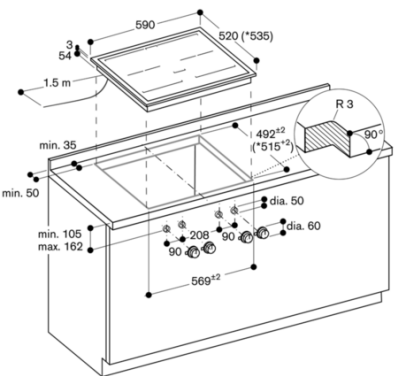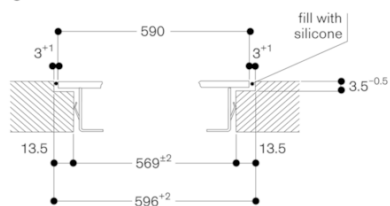


\* with filler strip  
For further installation options, see the installation instructions.

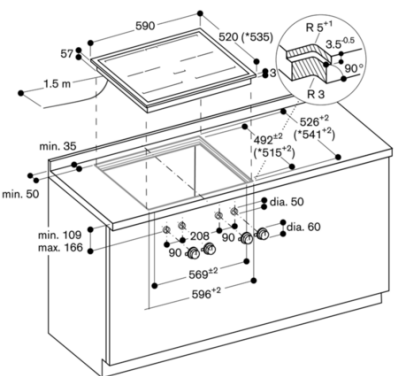

\* with filler strip  
For further installation options, see the installation instructions.

Installation of the control knob; flush installation

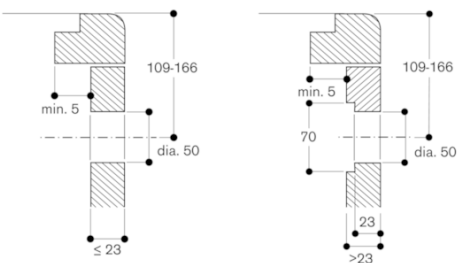

Installation of the control knob; surface mounting

