

N 50
OVEN
B6ACH7AN0A



COOKING PASSION SINCE 1877



Included accessories

1 x combination grid, 1 x universal pan

Optional accessories

Z11TF36X0 3 level telescopic rails, full ext

Built-in oven with Hide® - the fully retracting oven door

- ✓ CircoTherm® - Neff's outstanding hot-air system for simultaneous baking and roasting on up to 3 levels.
- ✓ Hide® - the fully retracting oven door.
- ✓ The duo for perfect cleaning: Pyrolysis after heavy use - the oven interior cleans itself.
- ✓ EasyClean® - the environment-saving option for fast oven cleaning.
- ✓ Modern LED lighting for bright, even illumination.

Features

Technical Data

Color / Material Front : Stainless steel
 Built-in / Free-standing : Built-in
 Integrated Cleaning system : Hydrolytic, Pyrolytic
 Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
 Dimensions of the product (mm) : 595 x 594 x 548
 Dimensions of the packed product (HxWxD) (mm) : 660 x 690 x 650
 Control Panel Material : Glass
 Door Material : Glass
 Net weight (kg) : 38.130
 Usable volume of cavity (l) : 71
 Cooking method : Bottom heat, Bread Baking Setting, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza setting
 First cavity material : Other
 Temperature control : No control of the temperature
 Number of interior lights : 1
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 120
 EAN code : 4242004237860
 Number of cavities (2010/30/EC) : 1
 Energy efficiency class (2010/30/EC) : A
 Energy consumption per cycle conventional (2010/30/EC) : 1.04
 Energy consumption per cycle forced air convection (2010/30/EC) : 0.81
 Energy efficiency index (2010/30/EC) : 95.3
 Electrical connection rating (W) : 3600
 Current (A) : 16
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : no plug



4 242004 237860

N 50 OVEN B6ACH7AN0A

Features

Heating Functions

- Oven with 8 heating methods:
CircoTherm®
Top/bottom heating
Circo-roasting
Full surface grill
CircoTherm® Intensive
Bread Baking
Bottom heating
Hotair gentle
- Temperature range 30 °C - 275 °C
- Cavity volume: 71 net usable litres

Design

- Rotary Control, Retractable control knobs
- Enamel grey with 4 shelf positions

Cleaning

- Pyrolytic self cleaning
- EasyClean® Cleaning aid programm
- Full glass inner door - safer touch door

Convenience

- White LCD display
- Temperature proposal
automatic start
Optical temperature control
Actual temperature display
Sabbath setting
- Hide door
- Electronic clock
- Rapid heating-up
- Halogen lighting
- Cooling fan
- Bar handle

Hook-in racks / rails

- Large capacity oven with shelf supports, Telescopic shelf rails
available as optional accessory

Accessories

- 1 x combination grid, 1 x universal pan

Safety and Environment

- Automatic door lock during pyrolysis
Individual adjustable child lock
Safety switch off
Residual heat indicator
- Quadruple glazed CoolTouch door
- Maximum door temperature 30° C

Technical Info


- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW
- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm -
568 mm x 550 mm
- Please reference the built-in dimensions provided in the
installation drawing

N 50
OVEN
B6ACH7AN0A

Dimensioned drawings


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type | min. worktop thickness | |
|----------------------------|------------------------|-------|
| | fitted | flush |
| Induction hob | 37 mm | 38 mm |
| Full surface Induction hob | 47 mm | 48 mm |
| Gas hob | 30 mm | 38 mm |
| Electric hob | 27 mm | 30 mm |

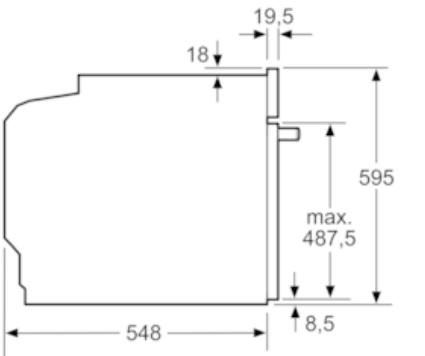

measurements in mm

Installation with a hob.

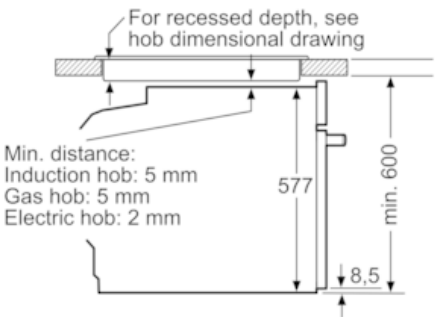

measurements in mm

