



RHEEM metro CONTINUOUS FLOW FLUE DIVERTER



GAS



6 STAR

2 - 5

PEOPLE

24
L/MIN

DELIVERY

10
YEAR

HEAT
EXCHANGER
WARRANTY¹

Rheem Metro Plus with Flue Diverter gives you added flexibility in installation, while enabling compliance with relevant national and local regulations. The flue diverter can be simply fitted to the water heater, even when installed within a recess box.

Note: you should confirm with your local authorities that the installation complies with all regulations applicable in your area.

- **50°C model for the added safety of a fully-tempered home (without the cost of a tempering valve)²**
- Adjustable to deliver 50°C at the nearest tap
- Recess Box available - to set water heater into the wall. Compatible with flue diverter.
- **Remote Temperature Controller options** for added convenience and safety
- **Digital display** for easy fault diagnosis and service
- **10 Year Heat Exchanger Warranty¹**
- **Flamesafe[®] overhear protection** – shuts down the heater before overheating can occur
- **Rheem Q Factor** – hot water every time, without fluctuation when multiple taps demand hot water
- Technical support via Rheem's National Service Network
- Wall Mount Security Bracket available – for added water heater security
- Natural Gas
- **Frost protected** down to -20°C




COMES ON STEADY, HOT AND STRONG

INSTALL A





RHEEM metro CONTINUOUS FLOW FLUE DIVERTER

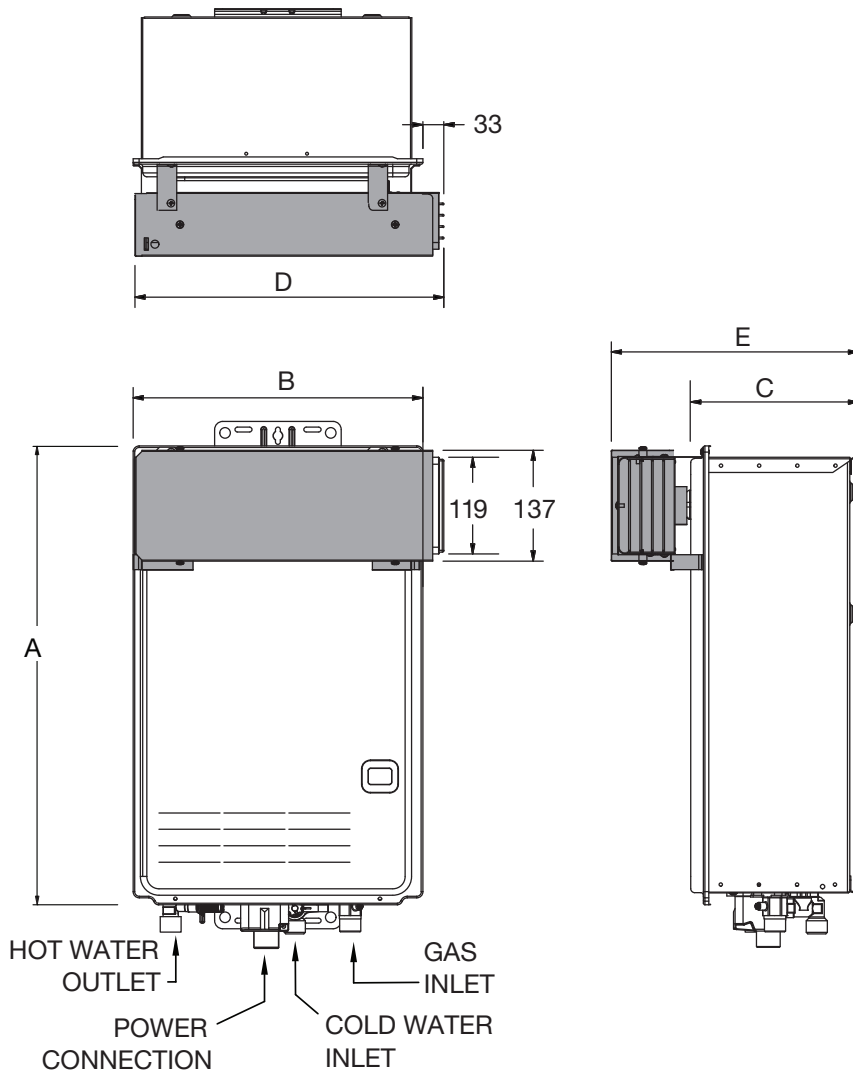

SPECIFICATION

Rheem
metro
plus

Model Number 875E24NF-FD

Comprising: Rheem Continuous Flow 875E24NF-D
& Rheem Flue Diverter³ 299876


Pre-set Temperature	°C	50
Number of People		2 – 5
Gas Type		Natural Gas
Gas Energy Rating	Stars	6.0
Flow Rate @ 25°C Rise	L/min	24
Min. Operating Flow Rate	L/min	2.7
Nominal Gas Consumption	MJ/hr	188

Dimensions

Height A	mm	565
Width B	mm	350
Depth C	mm	205
Width D - with flue diverter fitted	mm	379
Depth E - with flue diverter fitted	mm	305
Depth – from wall to Hot Water Outlet	mm	127
Depth – from wall to Cold Water Inlet	mm	53
Depth – from wall to Gas Inlet	mm	103
Weight (empty)	kg	19
Max. Water Supply Pressure	kPa	1000
Min. Water Supply Pressure	kPa	140
Cold Water Connection		R ¾
Hot Water Connection		R ¾
Gas Connection		R ¾

Accessories

Pipe Cover	299848
Recess Box	299842
Wall Mount Security Kit	299868

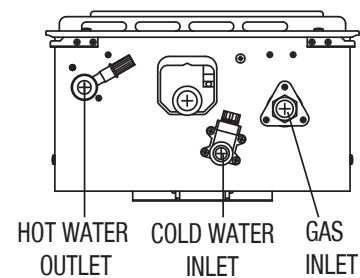

¹ Continuous Flow Warranty Conditions:

10 Years parts and 3 Years labour on Heat Exchanger, 3 Years parts & labour on other components, when installed in a domestic dwelling. For all other installations, the warranty period is 1 Year parts and labour on Heat Exchanger and other components. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty.

² 60°C and higher temperature models and some applications require a tempering valve in accordance with AS 3500.4.

³ Rheem Flue Diverter 299876 is approved for use on Rheem 875E24NF-D model only. It must not be fitted to other Rheem models or other branded models, as this may create an unsafe operating situation.

Information current as at 18/01/2016. Materials and data are subject to change without notice.

[®] Registered Trademark of Rheem Australia Pty Ltd.

[™] Trademark of Rheem Australia Pty Ltd.



Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508, Silverwater, New South Wales 2128, Australia.

