
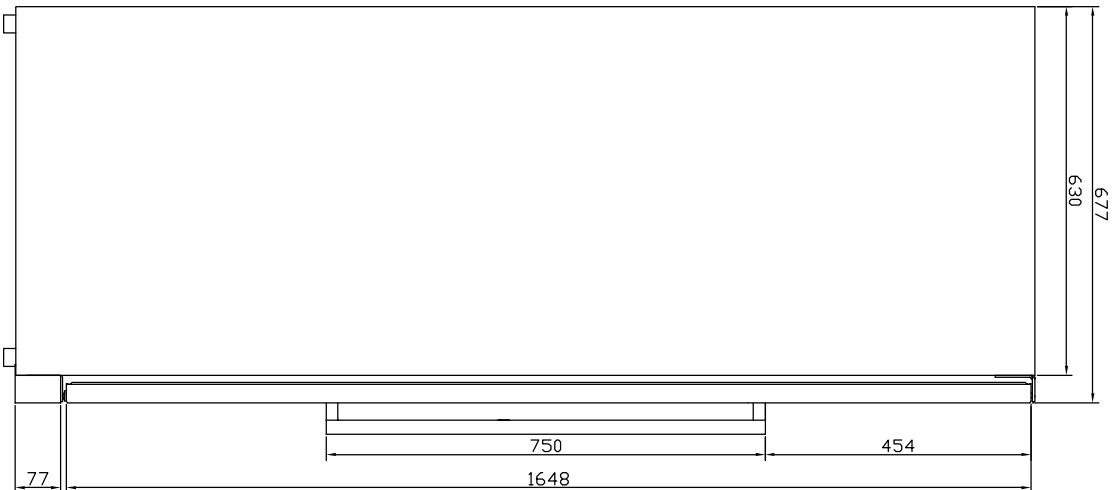


UNDERBENCH INSTALLATION INSTRUCTIONS FOR BUILDING IN TIGHT WITH JOINERY

1. Cabinet dimensions:
 - height 1761.5mm - 1781.5mm (20mm adjustable feet)
 - width 595mm
 - depth 667mm (tube handle protrudes 40mm beyond this)
2. Please note that a minimum cut out of 615mm is required to facilitate installation, removal and servicing.
3. This cabinet requires 10mm clearance on both sides and on top, 50-100mm clearance at the rear. If a cupboard is to be placed above the wine cabinet, it must be stood off the wall 50 - 100mm to allow any heat generated by the cabinet to dissipate. See diagram
4. This cabinet is front venting and front grille cannot be covered unless ventilation grille is fitted. Please contact Transtherm Australia on 1800 666 778 for further information on this issue.
5. Where possible the powerpoint should be offset for easy access. This is not imperative but is advised where the opportunity exists. 240V 10 amp own power supply.
6. The power cord is 1.9m length and is fixed on the right side at the back of the cabinet when looking from front.. It is advised to use a power surge protector in case of electricity supply fault.
7. Ventilation - it is important that the appliance be well ventilated and that air can circulate unhindered above, below and around it.

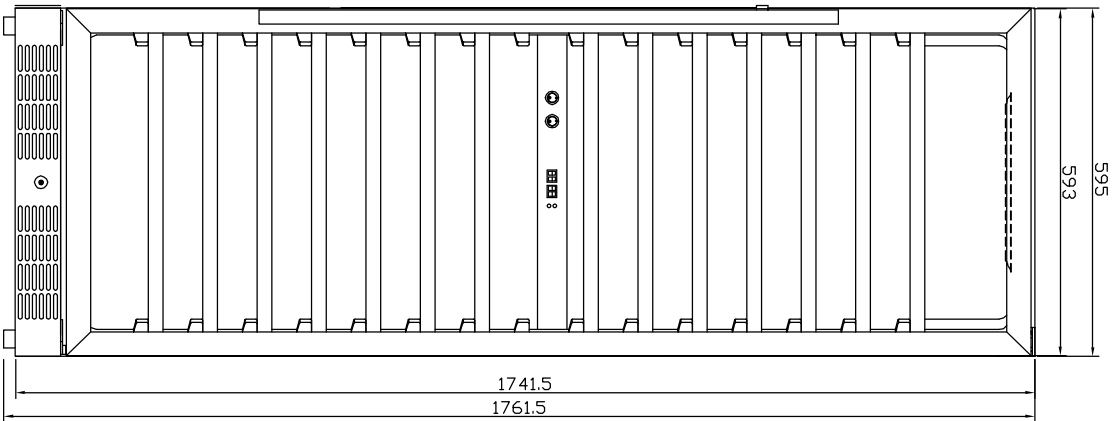

公司型号	JG166B
客户型号	V155SG"2e"SS

制图	胡元亮
工艺	
标准	
审核	
批准	
日期	04/27/07
日期	04/27/07

总图			
材料名称	材料代	单位	mm
号		尺寸	A4

适用机种	
比例	
重量	
总页数	第 1 页
最新版本	

版次	A
变更描述	正式出图
签名	胡元亮
日期	04/27/07

日期	04/27/07
日期	04/27/07

单位	mm
尺寸	A4

新顺翔电器制造有限公司
