



Color Variants

VG295220AU
Black anodized control panel in
aluminium
Width 90 cm

Included accessories

1 x WOK attachment ring.

Optional accessories

WP400001
Wok pan made of multiple-layer
material

VG295220AU
Gas cooktop 200 series
Black anodized control panel in
aluminium
Width 90 cm
Natural gas 10 mbar
Nozzles for liquid gas included
Wok burner with up to 18MJ

Control panel for comfortable and
secure operation
Mechanical power level regulation for
9 power levels, with exact setting and
reproduction of flame size
Multi-ring burner of solid, heat-
resistant brass as used in
professional kitchen
Solid smooth-surface cast iron pan
supports

Cooking zones

1 multi-ring wok burner with 18 MJ/h
2 two-ring high output burners with 14.4
MJ/h
2 two-ring standard burners with 7.2 MJ/
h

Handling

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Three-part cast iron pan support with
flat, continuous pot surface.
Brass burner rings.

Safety

Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes

No intermediate shelf required.
Appliance can be snapped into the
worktop from above.
Rear panel and wall trims must be
heat-resistant and consist of a non-
flammable material.
Installation in a 90 cm wide lower
cabinet is required.
A minimum lateral clearance of at least
300 mm from adjacent heat-sensitive
furniture or contact surfaces must be
observed or thermal insulation fitted.
With a total connected load of
more than 11 kW local regulations
concerning room ventilation, room
size and combination of extraction or
recirculation hoods must be observed.
Minimum clearance between gas
cooktop(s) with more than 11 kW and
ventilation hood 76 cm.
Appliance weight: approx. 29 kg.

Connection

Total connected load gas 61.2 MJ/h
Total connected load electric 10.0 W.
Connecting cable 1.7 m with plug.

Characteristics

Product name/family
gas hob w integrated controls
Built-in / Free-standing
CONSTR_TYPE.Built-in
Energy input
Gas
Total number of positions that can be
used at the same time
5
Required niche size for installation
(HxWxD)
106 x 885 x 492
Width of the product (mm)
914
Dimensions of the product (mm)
106 x 914 x 510
Dimensions of the packed product
(HxWxD) (mm)
290 x 700 x 1010
Net weight (kg)
28.579
Gross weight (kg)
31.0
Residual heat indicator
Separate
Location of control panel
Hob front
Basic surface material
brushed stainless steel
Color of surface
Stainless steel
Color of frame
Stainless steel
Approval certificates
Australia Standards, Australia
Standards
Length electrical supply cord (cm)
170
EAN code
4242006280444



Consumption and connection features

Electrical connection rating (W)
10
Gas connection rating (W)
17000
Current (A)
10
Voltage (V)
220-240
Frequency (Hz)
50; 60

2019-03-05
Page 1

VG295220AU
Gas cooktop 200 series
Black anodized control panel in
aluminium
Width 90 cm
Natural gas 10 mbar
Nozzles for liquid gas included
Wok burner with up to 18MJ
2019-03-05
Page 2

Gas connection

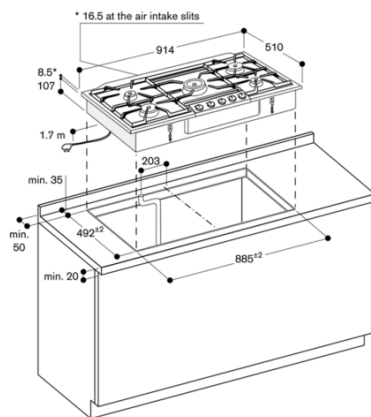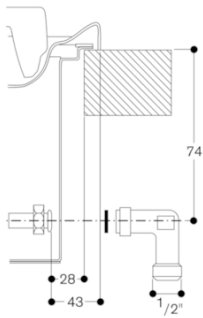

Minimum distance from the appliance cut-out to the side wall 300 mm.