
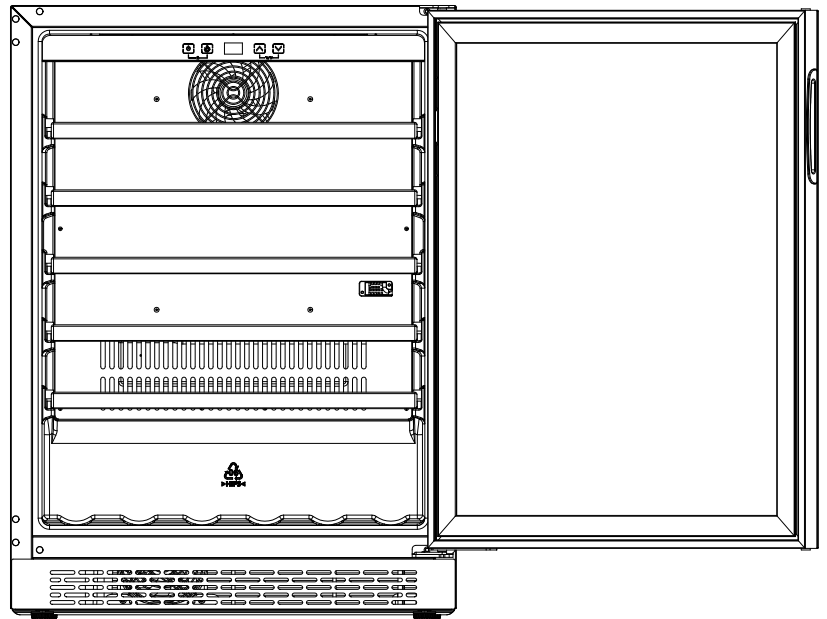


LeCavist

Instruction Manual

SINGLE-ZONE WINE CABINET

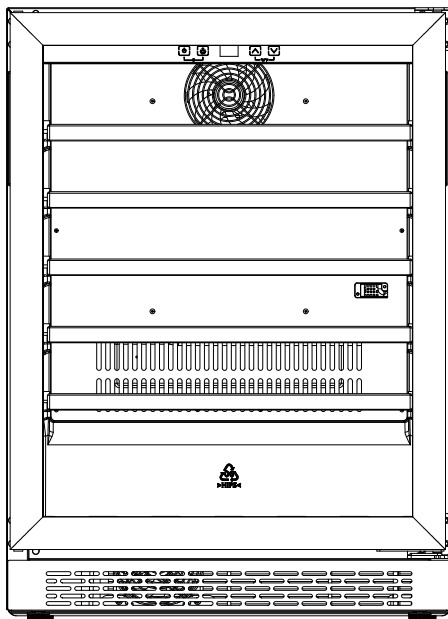

www.lecavist.com

MODEL: LJ52VNBU

CONGRATULATIONS

Congratulations and thank you for choosing LeCavist for your wine storage solution.

This appliance complies with all relevant safety requirements in Australia. Inappropriate use can, however, lead to personal injury and damage to property.

In order to operate the unit correctly and safely, please read this instruction manual carefully before installation and use. This user manual which provides you with all required instructions related to safety, installation, use and maintenance of the appliance.

For future reference, please store this booklet in a safe place and ensure that all users are familiar with the contents. Pass them on to any future owner of the appliance.

Record Model & Serial Number

Model:.....

Serial Number

Register your product at www.lecavist.com

IMPORTANT

Adherence to the directions for use in this manual is extremely important for health and safety. Failure to strictly adhere to the requirements in this manual may result in personal injury, property damage and affect your ability to make a claim under the LeCavist manufacturer's warranty provided with your product. Products must be used, installed and operated in accordance with this manual. You may not be able to claim on the LeCavist manufacturer's warranty in the event that your product fault is due to failure to adhere this manual.

Correct Conditions of Use

- The appliance is intended for use in the home and similar environments only. It is not intended for commercial use.
- The appliance is not suitable for outdoor use, non-stationary installation.
- This wine cooler can be only used to store various types of wines



Installation must comply with the valid standards, regulations and laws. All safety and warning information and the operating and installation instructions must be complied with.

TABLE OF CONTENTS

1. General Information	03	6.4 Defrosting	09
1.1 Appliance information		6.5 Shelves	
2. General Safety Instructions	03	6.6 The winter function	
2.1 General safety information		7. Loading	10
2.2 Safety instruction - Installation		8. Care and maintenance	10
2.3 Correction use & Operation	04	8.1 In case of a power cut	
2.4 Disassembling and Disposal		8.2 Moving your wine cooler	
of the Appliance		9. In the event of a breakdown	10
2.5 Accessories and Spare parts		10. Troubleshooting guide	11
3. Technical data sheet	05	Replacing the light	
4. Installation instruction	07	11. Environmental tips	12
5. Use instruction	08	11.1 Disposal considerations	
5.1 Routine maintenance and care instructions		11.2 Disposing your old appliance	
6. Equipment	09	12. Warranty and After sales	12
6.1 The climate control system		12.1 Warranty	
6.2 The anti-vibration system		12.2 After sales service	
6.3 The anti-UV system		12.3 Replacement of spare parts	


Additional information on products, accessories, warranty, replacement parts and services can be found at www.lecavist.com

1. GENERAL INFORMATION

1.1 Appliance Information

- A damaged appliance can be dangerous. If you find the appliance is damaged or marked, you must report it within 7 days if you wish to claim for damage/marks under the manufacturer's warranty. This does not affect your statutory rights. Do not use a damaged appliance.
- The manufacturer's warranty will be invalidated if the appliance is not repaired by a LeCavist approved service technician.
- Faulty components must only be replaced by genuine LeCavist spare parts. The manufacturer can only guarantee the safety of the appliance when LeCavist replacement parts are used.
- If the power cord is damaged, it must only be replaced by a LeCavist authorised service technician or suitably qualified electrician in order to avoid a hazard.
- LeCavist cannot be held liable for non-compliance with these instructions, resulting from incorrect or improper use or operation.

2. GENERAL SAFETY INSTRUCTIONS

 The appliance complies with the stipulated safety requirements in Australia. The user is responsible for appliance cleaning and maintenance as well as its safe use. Improper use can lead to personal injury and damage to property.

2.1 General Safety Instructions

Children and People with Special Needs



WARNING

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- The appliance is NOT suitable for use by children without supervision.
- Young children should be supervised near the appliance to ensure they do not play with this appliance.
- Children may be able to wrap themselves in packing material or pull it over their heads with the risk of suffocation. Keep children away from any packing material.

Unauthorised Modifications

Unauthorised modifications can cause the appliance to pose risks. Do not conduct any modifications to the appliance.

Cleaning & Maintenance

The device must be cleaned regularly. Dirt can lead to damage or the build up of odours.

- Always clean the appliance exactly as indicated in the operating instructions.
- Always ensure the appliance is switched off before cleaning or replacing parts.
- There is a risk of fire if cleaning is not carried out as described in these operating instructions.
- Make sure no water penetrates inside the device when cleaning. Do not use a steam cleaning appliance to clean this appliance. The steam could reach electrical components and cause a short circuit.
- In areas which may be subject to infestation by cockroaches or other vermin, pay particular attention to keeping the machine and its surroundings in a clean condition at all times. Any damage which may be caused by cockroaches or other vermin will not be covered by the machine warranty.

2.2 Safety Instructions - Installation

- In order to avoid any potential hazard, the installation instructions must be followed.
- Observe all regional regulations for the installation of ventilation systems.
- During installation, maintenance and repair work, the appliance must be disconnected from the mains electricity supply. It is only completely isolated from the electricity supply when:
 - the mains circuit breaker is switched off, or
 - it is switched off at the wall socket and the plug is withdrawn from the socket.
- Do not damage the refrigerant circuit.
- After the wine cooler is installed in place, the plug shall be easily accessible to facilitate the removal of the cooler plug in case of any accident.

- THIS APPLIANCE MUST BE PROPERLY EARTHED. It is most important that this basic safety requirement is present and tested regularly and, where there is any doubt, the household wiring system should be inspected

- Do not pull the mains connection cable but the mains plug to disconnect your appliance from the mains electricity supply.
- Do not connect the appliance to the mains electricity supply by a multi-socket unit or an extension lead.
- Extension leads are a fire hazard and do not guarantee the required safety of the appliance.
- Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults. Only open the housing as described in the instructions given in "Installation" section of this booklet. Under no circumstances should any other parts of the housing be opened.
- Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.

by a qualified electrician.
LeCavist cannot be held liable for noncompliance with these instructions, resulting from incorrect or improper use or operation.

2.3 Correct use and Operation

- For safety reasons, this appliance may only be used after it has been installed.
- Reliable and safe operation of this appliance can only be assured if it has been connected to the main electricity supply.
- Before using the appliance, ensure that all packaging materials are removed from the appliance and make sure that the connection data on the data plate [voltage (V) and frequency (Hz)] indicated on the appliance corresponds to the voltage and frequency of the power supply in your household. Consult a qualified electrician if in doubt.
- DO NOT store or spray flammable materials in the appliance or near this appliance while it is in operation (e.g. aerosols).
- Prevent water ingress. Never sprinkle or flush the cooler using water, place the cooler in an area exposed to moisture water sprinkling, or fill the cooler with water, so as to avoid impairment of the electric insulation of the cooler. Furthermore, failing to follow such requirements may lead to electric shock and fire, or other accidents.

- After the cooler is put into operation, never touch its inner surface, especially when your hand is wet; otherwise the skin may stick onto the inner surface to get injured.
- Regularly clean surfaces that can come in contact with food and accessible drainage systems. If the refrigerating appliance is left empty for long periods, switch off, clean, dry, and leave the door open to prevent mould developing within the appliance.
- Opening the door for long periods can cause a significant increase of the temperature in the compartments of the appliance.
- Cracks, fissures or fractures in the panels can damage the underlying electronics. Switch off and disconnect the appliance immediately.



WARNING

The refrigerant isobutane (R600a) is contained within the refrigerant circuit of the appliance, a natural gas with a high level of environmental compatibility, which is nevertheless flammable. During transportation and installation of the appliance, ensure that none of the components of the refrigerant circuit becomes damaged.

2.4 Disassembling and Disposal of the Appliance

(see the “Environmental Tips” section for best practices on disposing of this appliance).

The device must only be disassembled by trained specialists who are familiar with and comply with the standard national regulations and supplementary regulations of the local utility companies.

Work on electrical components must only be conducted by trained electrical personnel.

2.5 Accessories and Spare parts

Incorrect components can lead to personal injury or damage to the appliance. Only use original Lecepage spare parts for repairs.

Modifications, additions or alterations to the appliance can lead to safety risks. If spare parts or accessories from other manufacturers are used, the warranty will be invalidated, and Lecepage cannot accept liability.

Please check www.lecavist.com for more information.


3. TECHNICAL DATA SHEET

General information cooling					
Supplier's name or trade mark: Osass Australia Pty Ltd. ACN 005 635 398 ABN 96 005 635 398					
Supplier's address: Unit 19/20-28 Maddox Street, Alexandria NSW 2015					
Model identifier: LJ52VNBU					
Type of refrigerating appliance:					
Low-noise appliance:		no		Design type:	
Wine storage appliance:		yes		Other refrigerating appliance:	
				no	
General product parameters:					
Parameter		Value		Parameter	
Overall dimensions (millimetre)	Height	820		Total volume (dm ³ ou l)	140
	Width	595			
	Depth	575			
EEI		172		Energy efficiency class	
				G	
Airborne acoustical noise emissions (dB(A) re 1 pW)		39		Airborne acoustical noise emission class	
				C	
Annual energy consumption (kWh/a)		146		Climate class:	
				N/ST	
Minimum ambient temperature (°C), for which the refrigerating appliance is suitable		16		Maximum ambient temperature (°C), for which the refrigerating appliance is suitable	
				38	
Winter setting		yes			
Compartment Parameters:					
Compartment type		Compartment parameters and values			
		Compartment Volume (dm ³ or l)	Recommended temperature setting for optimised food storage (°C) These settings shall not contradict the storage conditions set out in Annex IV, Table 3	Freezing capacity (kg/24 h)	Defrosting type (auto-defrost = A, manual defrost = M)
Pantry	no	—	—	—	—
Wine storage	yes	140	12	—	M
Cellar	no	—	—	—	—
Fresh food	no	—	—	—	—
Chill	no	—	—	—	—

Compartment type		Compartment parameters and values			
		Compartment Volume (dm³ or l)	Recommended temperature setting for optimised food storage (°C) These settings shall not contradict the storage conditions set out in Annex IV, Table 3	Freezing capacity (kg/24 h)	Defrosting type (auto-defrost = A, manual defrost = M)
0-star or ice-making	no	—	—	—	—
1-star	no	—	—	—	—
2-star	no	—	—	—	—
3-star	no	—	—	—	—
4-star	no	—	—	—	—
2-star section	no	—	—	—	—
Variable temperature compartment	no	—	—	—	—
For 4-star compartments					
Fast freeze facility		No			
Light source parameters:					
Type of light source		LED			
Energy efficiency class		N/A			
Minimum duration of the guarantee offered by the manufacturer:					
Additional information: N/A					
Weblink to the manufacturer's website, where the information in point 4(a) Annex of Commission Regulation (EU) 2019/2019 is found:					

4. INSTALLATION INSTRUCTIONS

Product model	LJ52VNBU
Voltage/ frequency	220-240VAC, 50Hz
Refrigerant/ weight	R600a/26g
Effective volume	140L
Loading capacity	52 bottles
Net weight	41kg
Unit dimension (WxDxH)	595×578×820mm
Packing dimension (WxDxH)	660×625×870mm

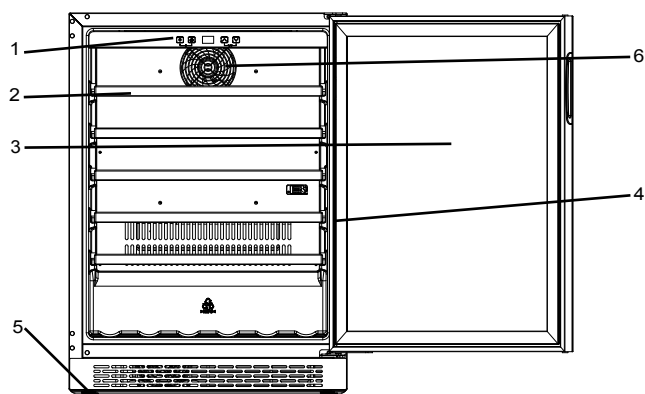

LJ52VNBU

1	Display panel
2	Frame
3	Door glass
4	Door Joint
5	Adjust the bracket
6	Fan

Announced capacity

The advertised capacity is the maximum capacity calculated with a defined number of shelves which varies depending on the model. This standard is calculated with 75cl traditional Bordeaux type bottles. Any other type of bottle format as well as the addition of shelves will considerably reduce the storage capacity.

When selecting a location for your appliance you should make sure the floor is flat and firm, and the room is well ventilated. An average ambient temperature must be observed. This temperature is specific according to the climatic class of the device:

Note : This refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 32 °C.

Before using this appliance

- Remove the exterior and interior packing.
- Before connecting the appliance to the power source, let it stand upright for approximately 24 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.
- When disposing your appliance, please choose an authorized disposal site.
- Place your wine cooler on a floor that is strong enough to support it when it is fully loaded. To level your Wine cooler, adjust the front leveling leg at the bottom of the wine cooler.
- Adequate ventilation is required, do not block the front air outlet.
- This wine cellar is designed for free-standing.
- Connect the cellar to a single socket, leaving a 30-mm gap between the back of the cellar and the wall. Be careful to support it, so that your wine cellar is perfectly level (use of a spirit level is recommended). This will prevent any movement due to instability, causing noise and vibration, and will ensure that the door seals perfectly.
- This appliance is intended to be used exclusively for the storage of wine.
- This appliance is using flammability refrigerant. So never damage the cooling pipe work during the transportation.

CAUTION

- Store wine in sealed bottles.
- Do not overload the cabinet.
- Do not open the door unless necessary.
- Do not cover shelves with aluminum foil or any other shelf material which may prevent air circulation.
- Should the wine cooler be left empty for long periods it is suggested that the appliance is unplugged, and after careful cleaning, leave the door ajar to allow air to circulate inside the cabinet in order to avoid possible condensation, mold or odors forming.


Ambient room temperature limits

- This appliance is designed to operate in ambient temperatures specified by its temperature class marked on the rating plate.
- The ambient temperature affects the interior temperature and humidity of your cellar. For optimal operation, the settings of your cellar are carried out for ambient temperatures of 23°C to 25°C.





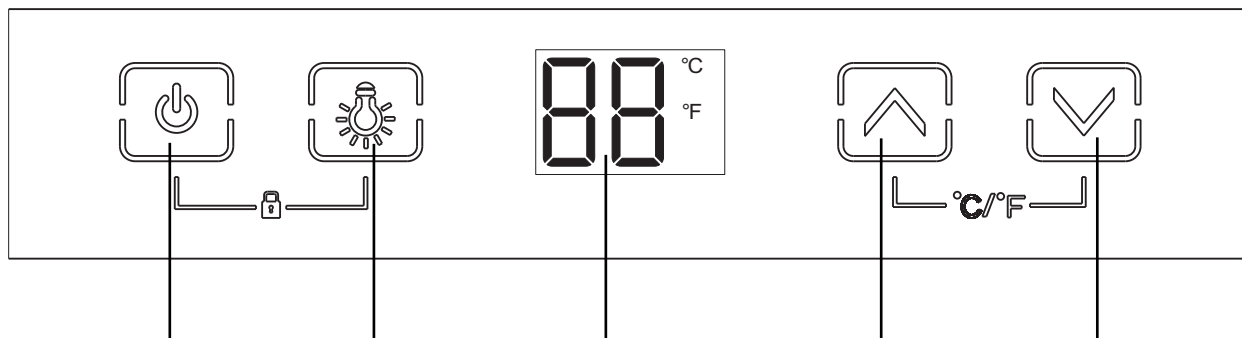

CLASS	SYMBOL	AMBIENT TEMPERATURES RANGE (°C)
Extended temperate	SN	From +10 to +32
Temperate	N	From +16 to +32
Subtropical	ST	From +16 to +38
Tropical	T	From +16 to +43


5. USE INSTRUCTIONS

Display board for double temperature zone model: LJ52VNBU




- ① power key ② Lamp on/off key ③ temperature display screen
④ temperature "+" key ⑤ temperature "-" key

1.		<p>Child lock key (combined key)</p> <p>The power supply is switched on, the cooler is in unlock mode, you can operate all the keys. The lock is not activated unless you set.</p> <p>Lock: To set the lock mode, press both keys simultaneously and result in a beep alarm.</p> <p>Unlock: To deactivate the lock, press both keys simultaneously and result in a beep alarm. Any operation should be in unlock mode.</p>
2.		<p>Celsius degree/ Fahrenheit degree switchover combine key</p> <p>Press both keys simultaneously, you can switch over between the Celsius degree and Fahrenheit degree for display. Each time the keys is pressed, a switchover will be made. When setting the temperature, it is not allowed to switch over between the Celsius degree and Fahrenheit degree.</p>
3.		<p>Power on/off key:</p> <ol style="list-style-type: none"> 1. Press this key for 3S, and then all external power sources will be disconnected and all external equipment will be turned off. 2. When the cooler is in the ready mode, press this power key for 3S, the cooler will restore its normal operation and work under real-time conditions.
4.		<p>Lamp on/off key</p> <p>The lamp control key is a cycling key: Normally on → Normally off → Normally on.</p>
5.		<p>Temperature "+" key</p> <ol style="list-style-type: none"> 1. The digit display indicates the current temperature. In unlock mode, this key can be operated to increase the set temperature by 1°C or 1°F each time the key is pressed. The display will indicate the set temperature in a flashing way at a certain interval, and 5s later, if no further action, the setting after adjustment will be memorized, and the display will exit from the flashing mode and will recover the indication of the current temperature. 2. Rules of temperature adjustment: For example: 12°C (current set temperature) → 13°C → 14°C → 20°C.
6.		<p>Temperature "-" key:</p> <ol style="list-style-type: none"> 1. This key can be operated to decrease the set temperature by 1°C or 1°F each time the key is pressed. The display screen will indicate the set temperature in a flashing way and at a certain interval, and 5s later, if no further action, the setting after adjustment will be memorized, and the display will exit from the flashing mode and will recover the indication of the current temperature. 2. Rules of temperature adjustment: For example: 12°C (current set temperature) → 11°C → 10°C → 5°C

<p>7. </p>	<p>Temperature“-” key:</p> <p>1.This key can be operated to decrease the set temperature by 1°C or 1°F each time the key is pressed. The display screen will indicate the set temperature in a flashing way and at a certain interval, and 5s later, if no further action, the setting after adjustment will be memorized, and the display will exit from the flashing mode and will recover the indication of the current temperature.</p> <p>2.Rules of temperature adjustment: For example: 12°C (current set temperature)</p> <p>→ 11°C→10°C→.....5°C for upper zone, 20°C (current set temperature) →19°C→18°C→.....12°C for bottom zone.</p>
---	--

5.1 Routine maintenance and care instructions

- To develop the best performance of this machine and prolong its service life, it shall be serviced frequently. Before maintenance, the power line plug shall be removed and it shall be confirmed that the power supply has been cut off.
- It is not allowed to remove the power line plug from the socket by pulling the cable.
- The cooler inside shall be thoroughly cleaned every year. To clean the cooler, the plug shall be removed and the cooler shall be emptied. Then the cooler inside shall be cleaned using the wet soft cloth or sponge dipped with clean water or soap liquid (or any other non-corrosive neutral cleanser). It is not allowed to clean the cooler using the organic solvent, alkaline detergent, boiled water, washing powder or acid and the like.
- In the humid environment or in the rainy weather, the cooler surface may be dewed, especially on the external surface of the glass door. This is caused due to the contact with the moisture in the air. In such a case, the surface can be dried using the dry cloth.
- To ensure the normal operation of the cooler in a long period of time, the user should inspect the cooler on a regular basis; if any abnormality is found, the manufacturer shall be notified of the same immediately.
- During cleaning operation, it is not allowed to use the water to flush the compressor compartment of the cooler. After cleaning operation, the cooler shall be wiped using the dry cloth to prevent rusting.

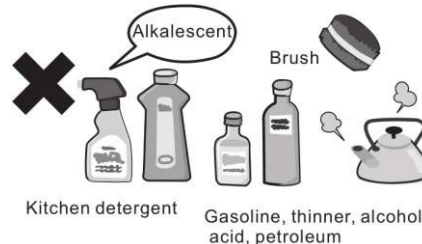

6. EQUIPMENT

6.1 The climate control system

According to advice from specialists, the ideal temperature for storing wine is around 12°C, within a bracket of 10 to 14°C. Do not confuse this with service temperature, which varies between 5 and 18°C, depending on the specific nature of the wine.

It is especially important to avoid sudden changes in temperature. Designed by specialists for oenophiles, this appliance, unlike a simple refrigerator, takes into account the sensitivity of grand cru wines to sudden variations in temperature by ensuring the close control of a constant average temperature.

6.2 The anti-vibration system

The refrigeration compressor is equipped with special dampers (silent-blocks) and the inner space is insulated from the body by a thick layer of polyurethane foam. These characteristics prevent the transmission of vibration to your wines.

6.3 The anti-UV system

Light accelerates the ageing of wine. In our solid door cellars, your wines are naturally protected, on condition, of course, that the door is not opened too often. This glass-door model has been specially treated and filters out harmful ultraviolet rays, thus ensuring your wines are perfectly shielded.

6.4 Defrosting

Your appliance is equipped with an automatic defrost cycle. When a cooling cycle finishes, the appliance's refrigerated surfaces are defrosted automatically. The defrost water is channeled into a condensates evaporation tray which is located in the back of the appliance near the compressor. The heat produced by the compressor then evaporates the condensates collected in the tray.

6.5 Shelves

> To prevent damage to the door seal, ensure that the door is fully open before pulling out the shelves to add or remove bottles.

> For easier access to the contents of the shelves, slide the shelf out approximately one third of the way. The shelves are, however, fitted with a stop to prevent the bottles falling out.


6.6 The winter function

The winter function is a frost protection system which enables the cellar to operate in an environment where the temperature is between 5 and 38°C. A sensor located outside the appliance triggers a low power electrical element when the ambient temperature in the room falls to around 8°C in case. This is a low power element to avoid sudden rises in the temperature of the wine and so avoid thermal shocks that are damaging to the preservation of the wine. The kit is intended to raise the cellar's internal temperature even before there is a thermal exchange with the bottles.

7. LOADING

> The maximum recommended loading quantities for bottles are given as guidelines and are indicative only; they provide a quick estimate of the size of the appliance (similar to the capacity of a refrigerator expressed in liters).

Back of the shelf

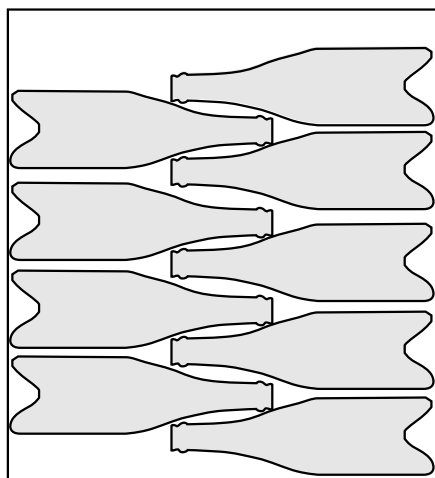

> They correspond to tests conducted with a standard bottle: the standard "75 cl light Bordeaux" bottle -standards apply the geographical origin of each bottle shape (Bordeaux, Burgundy, Provence, etc.) and a type (traditional, heavy, light, flute, etc.), each with its own diameter and height.
> These caves present bottles of wine, thanks to the highlighting of the labels of each wine. You will find below the plan of loading of your bottles on a clay, knowing that it is possible to put up to 9 bottles on a shelf.

Front of the shelf

Opinions vary, and the ambient temperature too, but many people agree on the following:

Prestigious Bordeaux wines – Reds 16 – 17°C
Prestigious Burgundy wines – Reds 15 – 16°C
Prestigious dry white vintages 14 – 16°C
Light, young, fruity reds 11 – 12°C
Provence rosés, primeur wines 10 – 12°C
Dry whites and vin de pays reds 10 – 12°C
Vin de pays whites 8 – 10°C
Champagnes 7 – 8°C
Sweet wines 6°C

8. CARE AND MAINTENANCE

> Before cleaning your appliance (something that should be done regularly), disconnect it by removing the plug or by pulling the fuse on the circuit.

> Before using your appliance for the first time and regularly after that, we recommend that you clean the inside and outside (front, side and top) with warm mixed with a gentle cleaning product. Rinse with clean water and allow drying before reconnecting. Do not use solvents or abrasives. When the appliance is switched on for the first time, there may be a residual odor. In that case, run the appliance empty for a few hours at the coldest possible temperature. The cold will kill any odors.

8.1 In case of a power cut

> Most power cuts are resolved within a short time. A power cut of 1 or 2 hours will not affect the temperature in your cabinet. To protect your wines during a power cut, avoid opening the door as much as possible.

> During very long power cuts, take the necessary measures to protect your wine. If the appliance is disconnected or if there is a power cut, you must wait three to five minutes before restarting. If you try to re-start before this time, the compressor will only re-start after 3 to 5 minutes (if the temperature requires). When switching on for the first time or following a prolonged shutdown, it is possible that when re-starting, the temperatures selected and those displayed are not the same. This is normal. It will take a few hours before they stabilize.

8.2 Moving your wine cooler

Remove all items.

- > Securely tape down all loose items (shelves) inside your appliance.
- > Turn the adjustable leg up to the base to avoid damage.
- > Tape the door shut.
- > Be sure the appliance stays secure in the upright position during transportation. Also protect outside of appliance with a blanket, or similar item.

9. IN THE EVENT OF A BREAKDOWN

Despite the care, we take during production, a breakdown can never be totally ruled out. Before contacting your retailer's after-sales department, please check that:

- > The appliance is properly plugged in.
- > There is not a power cut in progress.
- > The breakdown is not one of those described in the table at the end of this manual.

IMPORTANT: If the power cable supplied is damaged, it must be replaced by the manufacturer, a service centre approved by the brand or the retailer. In all events, it must be replaced by qualified personnel in order to avoid any risk of injury.


10. TROUBLESHOOTING GUIDE

You can solve many common Wine Cooler problems easily, saving you the cost of a possible service call. Try the suggestions below to see if you can solve the problem before calling the servicer.

PROBLEM	POSSIBLE CAUSE	POSSIBLE SOLUTION
Wine Cooler does not operate.	<ul style="list-style-type: none"> - Not plugged in / Turned OFF. - Tripped circuit breaker/ Blown fuse 	<ul style="list-style-type: none"> - Turn it On, or re-plug the appliance. - Check circuit breaker and fuse if working.
Temperature is not cold enough.	<ul style="list-style-type: none"> - Temperature control not set correctly. - The door is opened too often/ or not properly closed. - Damage or loose door seal. 	<ul style="list-style-type: none"> - Reset temperature, wait a few minutes. Environment and weather may require a higher setting. - Check the door for damages. Replace door seal.
Turns On and Off too often.	<ul style="list-style-type: none"> - Wrong temperature setting. - Large contents added to wine cooler. - The door is opened too often/ or not properly closed. - Damage or loose door seal. 	<ul style="list-style-type: none"> - Reset temperature, wait a few minutes. Environment and weather may require a higher setting. - Check the door for damages. Replace door seal.
The light does not work.	<ul style="list-style-type: none"> - Not plugged in/ Turned OFF. - Tripped circuit breaker/ Blown fuse - The light button is "OFF". 	<ul style="list-style-type: none"> - Turn it On, or re-plugged the appliance. - Check circuit breaker and fuse if working. - Check and press the light button.
Vibrations.	<ul style="list-style-type: none"> - The Wine cooler is not level. 	<ul style="list-style-type: none"> - Check and adjust wine cooler feet.
Making too much noise.	<ul style="list-style-type: none"> - As each cycle ends, you may hear gurgling sounds caused by the flow of refrigerant. Some noise may come from the flow, which is normal. - Contraction and expansion of the inside walls may cause popping and crackling noises. - The Wine Cooler is not level. 	<ul style="list-style-type: none"> - Check and adjust wine cooler feet.
The door does not close properly.	<ul style="list-style-type: none"> - The Wine Cooler is not level. - Door is reversed and/ or not installed correctly. - Dirty door seal. - Shelves are not place correctly. 	<ul style="list-style-type: none"> - Check and adjust wine cooler feet. Choose an even/flat surface. - Re-install the door. - Replace the door seal. - Position the seal correctly.
The code " HH " is displayed on the control board	<ul style="list-style-type: none"> - Temperature is too high (>30°C) the code "HH" appears on the display and an audible alarm sound. 	<ul style="list-style-type: none"> - Deactivated audible alarm immediately by pressing the "ON/ OFF" button or by unplugging the cooler. In this case please contact the after-sales service.
The code "LL" is displayed on the control board	<ul style="list-style-type: none"> - Temperature is too high (>30°C) the code "HH" appears on the display and an audible alarm sound. 	<ul style="list-style-type: none"> - Deactivated audible alarm immediately by pressing the "ON/ OFF" button or by unplugging the cooler. In this case please contact the after-sales service.

Replacing the light

This appliance consists of light-emitting diodes (LEDs). This type of diode cannot be changed by the consumer. The lifetime of these LEDs is normally sufficient for no change to be made. If however, and despite all the care taken during the manufacture of your wine cellar, the LEDs were defective, please contact your after-sales service for any intervention.



11. ENVIRONMENTAL TIPS

Observe all safety and warning information during operation (see the "General Safety Instructions" section).

11.1 Disposal considerations

The transport and protective packaging has been selected from materials which are environmentally friendly for disposal, and can normally be recycled.

Recycling the packaging reduces the use of raw materials in the manufacturing process and also reduces the amount of waste in landfill sites. Ensure that any plastic wrappings, bags etc. are disposed of safely and kept out of the reach of babies and young children. Danger of suffocation.




11.2 Disposing of your old appliance

Electrical devices marked with this label may not be disposed of in domestic waste at the end of their service life.

Electrical and electronic appliances often contain valuable materials. They also contain specific materials, compounds and components, which were essential for their correct function and safety. These could be hazardous to human health and to the environment if disposed of with your domestic waste or if handled incorrectly. Please do not, therefore, dispose of your old appliance with your household waste.

Please dispose of those materials by contacting your local authorities and ask for the correct method of disposal. Please ensure that your old appliance poses no risk to children while being stored prior to disposal.

By disposing of this product in accordance with the regulations, you protect the environment and the health of those around you from negative consequences.



12. WARRANTY & AFTER SALES SERVICE

Observe all safety and warning information during operation (see the "General Safety Instructions" section).

In the event of a fault which you cannot remedy yourself, please contact LeCavist.

12.1 Warranty

The manufacturer's warranty for this appliance is 2 years.

12.2 After sales service

The contact details for LeCavist are given at the beginning and end of these instructions.

When contacting LeCavist, please quote the model and serial number of your appliance. These can be found on the data plate at the back of the wine cooler.

Record model & serial number

Model:.....

Serial Number:.....

Register your product www.lecavist.com

12.3 Replacement of spare parts

Incorrect components can lead to personal injury or damage to the appliance. Use only genuine original Lecavist spare parts.

Modifications, additions or alterations to the appliance can lead to safety risks. If spare parts or accessories from other manufacturers are used, the warranty will be invalidated, and Lecavist cannot accept liability.

Please check www.lecavist.com for more information.

LIKE TO KNOW MORE?

For further information on all LeCavist products,
or to obtain detailed dimension and installation
information, phone or email our Customer Care
team or visit our website: **www.lecavist.com**

Operating and installation instructions:

Original

√ Translation

Osass Australia Pty Ltd.
ACN 005 635 398
ABN 96 005 635 398

The distribution and duplication of this document, as well as the use and disclosure of its contents are prohibited unless expressly authorised.

These operating and installation instructions have been drawn up with the greatest of care. But it cannot be ruled out that subsequent technical modifications have not yet been incorporated or the relevant content has not yet been adapted. Please accept our apologies in this eventuality. An updated version can be requested from our team. Subject to printing errors and mistakes.

© LeCavist

All rights reserved.
