


iQ700 Oven HB875GDB1A

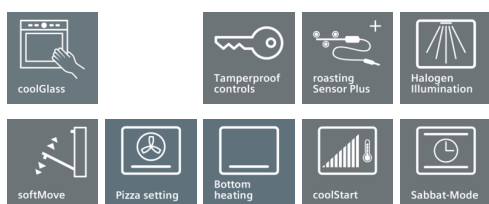

Included accessories

1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Optional accessories

HZG0AS00 : Connecting cable 3m , HZ915003 : Glass roasting dish, 5,4 L , HZ6CCF0 : Cookbook , HZ6BMA00 : Assembly kit for vertical installation , HZ66X650 : Cover Strip , HZ638370 : 3 level telescopic rails, full ext,pyro , HZ638270 : 2 level telescopic rails, full ext,pyro , HZ638170 : 1 level telescopic rail, full ext, pyro , HZ636000 : Glass pan , HZ634000 : Baking and roasting grid (standard) , HZ633070 : Professional pan, anthracite enamelled , HZ633001 : Lid for professional pan, enamelled anth , HZ632070 : Multipurpose pan, anthracite enamelled , HZ631070 : Baking tray, anthracite enamelled , HZ625071 : Grill tray, anthracite enamelled , HZ617000 : Pizza pan, anthracite enamelled , HZ327000 : Baking stone , HZ29020 : Conversion cabinet

Shorten your cooking time thanks to fast preheat and activeClean®.

- ✓ fast preheat: reach the required baking temperature sooner.
- ✓ activeClean: the automatic system for effortless cleaning.
- ✓ TFT Display: good readability from any perspective.
- ✓ roastingSensor Plus: simply reliable roasting.
- ✓ 4D hotAir: flexible choice of shelf.

Features

Technical Data

Color / Material Front : Black
Built-in / Free-standing : Built-in
Integrated Cleaning system : Pyrolytic
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550
Dimensions of the product (mm) : 595 x 594 x 548
Dimensions of the packed product (HxWxD) (mm) : 670 x 680 x 670
Control Panel Material : Glass
Door Material : Glass
Net weight (kg) : 38.0
Usable volume of cavity (l) : 71
Cooking method : , 4D hot air, Bottom heat, Conventional heat, Deep-frozen food special, Full width grill, Half width grill, Hot Air-Eco, Hot air grilling, low temperature cooking, Pizza setting, pre-heating, warming
First cavity material : Enamelled
Temperature control : electronic
Number of interior lights : 1
Approval certificates : CE, VDE
Length electrical supply cord (cm) : 120
Interior Lights - cavity 1 : 1
Pull-out system : Accessory
Clock function : Alarm, Off, On
Included accessories cavity 1 : 1 x enamel baking tray, 1 x combination grid, 1 x universal pan
Broil Element Wattages cavity 1 (W) : 2800
Convection Element Wattages cavity 1 (W) : 2200
Energy efficiency class (2010/30/EC) : A+
Energy consumption per cycle conventional (2010/30/EC) : 0.87
Energy consumption per cycle forced air convection (2010/30/EC) : 0.69
Energy efficiency index (2010/30/EC) : 81.2
Electrical connection rating (W) : 3600
Current (A) : 16
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : no plug
Color / Material Front : Black
Energy input : Electric
Approval certificates : CE, VDE
Required cutout/niche size for installation (in) : x x
Dimensions of the packed product (in) : 26.37 x 26.37 x 26.77
Net weight (lbs) : 84
Gross weight (lbs) : 90
Length electrical supply cord (cm) : 120
Net weight (kg) : 38.0
Gross weight (kg) : 41.0



4 242003 830888

iQ700

Oven

HB875GDB1A

Features

Heating Functions

- Oven with 13 heating methods:
 - 4D HotAir
 - 4D HotAir Eco
 - Top/ bottom heating
 - Top/bottom heating Eco
 - Hot air grilling
 - Full width grill
 - Half width grill
 - Pizza setting
 - coolStart (deep-frozen food special)
 - Bottom heating
 - Low temperature cooking
 - Plate warming setting
 - Keep Warm
- Temperature range 30 °C - 300 °C
- Cavity volume: 71 net usable litres

Design

- black Steel Design
- Rotary Control
- Anthracite enamel cavity with 5 shelf levels

Cleaning

- activeClean® – automatic self-cleaning function with automatic safety door lock
- Pyrolytic proof trayholder and baking tray
- Full glass inner door

Convenience

- 2,8"-TFT-color and text display with touch-control buttons
- Temperature proposal
 - Actual temperature display
 - Actual temperature display
 - Sabbath setting
- softMove: gentle opening and closing of the oven door.
- Number of automatic programmes: 10 PC
- roastingSensor with three measuring points
- Electronic clock and timer
- Rapid heating-up
- Halogen lighting
- Integrated cooling fan
- Stainless-steel fan
- Info button
- Bar handle

Hook-in racks / rails

- Cavity with shelf support rails, telescopic rails available as optional accessory

Accessories

- 1 x enamel baking tray, 1 x combination grid, 1 x universal pan

Safety and Environment

- Maximum door temperature 30° C
- Child lock for settings
 - Automatic safety switch-off function
 - Residual heat indicator
 - start button
 - Door contact switch

Technical Info

- Length of mains cable: 120 cm
- Total connected load electric: 3.6 KW
- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

iQ700
Oven
HB875GDB1A

Dimensioned drawings

Installation with a hob.

For recessed depth, see
hob dimensional drawing

Min. distance:
Induction hob: 5 mm
Gas hob: 5 mm
Electric hob: 2 mm

577

min. 600

7.5

measurements in mm

If the appliance will be installed underneath
a hob, the following worktop thicknesses
(including substructure if necessary)
must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

19.5

18

595

max. 487.5

548

7.5

measurements in mm

19.5

405

595

max. 45

577

594

548

535

Space for appliance
connection 320 x 115

measurements in mm

19.5

405

595

max. 45

577

594

548

535

Space for appliance
connection 320 x 115

measurements in mm

19.5

405

595

max. 45

577

594

548

535

Space for appliance
connection 320 x 115

measurements in mm